

OKAYA[®]

Chalti Rahe Yeh Zindagi



AUTOMOTIVE BATTERIES

MF/SMF Battery Range

HIGH CRANKING PERFORMANCE. HIGH ON TRUST.

- ✓ HIGH CRANKING PERFORMANCE
- ✓ ACCESSIBLE TYPE TOP COVER
- ✓ SILVER PLUS
- ✓ SUITABLE FOR TROPICAL CONDITIONS
- ✓ ECO FRIENDLY
- ✓ MAINTENANCE FREE BATTERY
- ✓ EXPANDED METAL TECHNOLOGY (EMT)
- ✓ BEST IN-CLASS WARRANTY



Recyclable
(Return used Batteries)



Eco-Friendly




TECHNICAL SPECIFICATION


Battery Type			MF/ SMF	AH (@20 Hour Rate)	Warranty Type	CCA	CC	RC	Dimensions(mm)			Cell Layout	Terminal Type	Filled Weight (kg)
Old JIS/DIN Type	New JIS/DIN Type	Okayo Part No.							L	W	H			
NS40Z	38B20R	OKGO-35R	MF	35	18+18*	280	400	54	197	136	227	1	B	10.3
NS40Z	38B20L	OKGO-35L	MF	35	18+18*	280	400	54	197	136	227	2	B	10.3
NS40Z	44B20R	OKGP-35R	SMF	35	24+24*	280	400	54	197	136	222	1	B	10.3
NS40ZL	44B20L	OKGP-35R	SMF	35	24+24*	280	400	54	197	136	222	2	B	10.3
NS40Z+BH	44B20R	OKGP-35R	SMF	35	24+24*	280	400	54	197	136	222	1	B	10.3
NS40ZL+BH	44B20L	OKGP-35L	SMF	35	24+24*	280	400	54	197	136	222	2	B	10.3
NS70	80D26R	OKGO-70R	MF	65	18+6*	435	660	115	259	173	225	1	A	18.1
NS70L	80D26L	OKGO-70L	MF	65	18+6*	435	660	115	259	173	225	2	A	18.1
N70Z	95D31R	OKGO-80 R	MF	75	18+6*	480	730	139	306	173	225	1	A	20.7
N90	100E41R	OKGO-90R	MF	90	18+6*	575	800	160	409	173	233	1	A	26
N90L	100E41L	OKGO-90L	MF	90	18+6*	575	800	160	409	173	233	2	A	26
N100	115E41R	OKGO-100	MF	100	18+6*	595	830	178	410	173	233	1	A	27.65
54434	54434	OKGP-DIN44	SMF	44	24+24*	X	420	56	207	175	190	2	A	12.2
55530	55530	OKGP-DIN55	SMF	55	24+24*	X	530	73	242	175	190	2	A	14.5
56628	56628	OKGP-DIN65(LH)	SMF	66	24+24*	X	680	105	278	175	175	2	A	17.60

* Pro-rata warranty (T&C Apply. For details, refer to the Warranty Card)

Cell Layout



Terminal Type

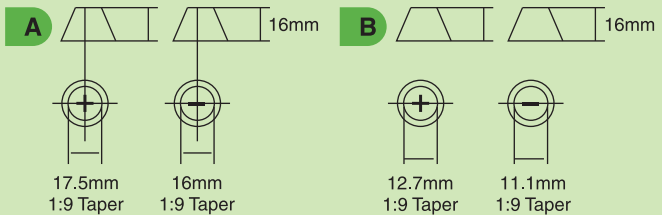

OKAYA POWER PVT. LTD.

D-7 Udyog Nagar Rohtak Road, New Delhi - 110041
Missed Call Service: +91 93131 41414 | **SMS:** +91 74001 40440
Toll Free: 1800 103 7011 | **Email:** helpline@okayapower.com